

Technical Data Sheet


CODE 11185

MF 100/4" PIR LL

Wall axial fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,09	Voltage (V)	220-240
Absorbed Power max (W)	15	Weight (Kg)	0,51
Frequency (Hz)	50	Delivery max (l/s)	24
Insulation Class	II°	Delivery max (m³/h)	85
IP	X4	Pressure max (mmH2O)	3
Max ambient temperature for continuous operation (°C)	50	Pressure max (Pa)	29
Max. absorbed power at max speed (W)	15	RPM	2400
Ø Discharge Hole (mm)	98	Sound Pressure level Lp [dB (A)] 3m	31

DIMENSIONS

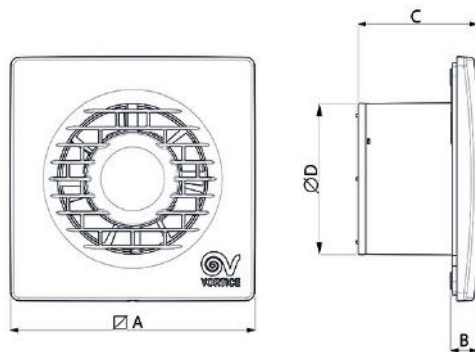

Etichetta Energetica	NO
Size A (mm)	159
Size B (mm)	17
Size C (mm)	77
Size D (mm)	98

Technical Data Sheet

CODE 11185

MF 100/4" PIR LL


Wall axial fans




DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 100 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 85 m³/h.
- Incorporates electronic presence detector with infrared sensor, and electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3'), after the room has been vacated.
- Non-return damper fitted to outlet port.
- IMQ SAFETY and IMQ PERFORMANCE certifications.
- Vortice speed controller.

CURVES

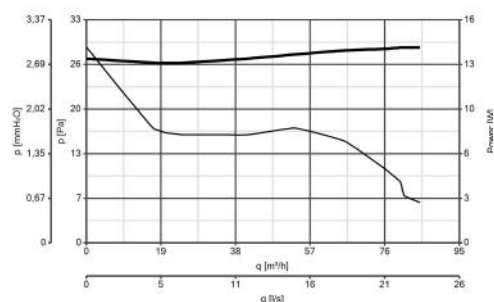

ACCESSORIES



SF 90-100

Code 22162



KIT SCB
(TRASF.E.C.)

Code 22481