Technical Data Sheet

CODE 11124

MF 120/5"

Wall axial fans



Certifications

IMQ

CE

IMQ Performance

CCC


EAC

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,12
Absorbed Power max (W)	20
Frequency (Hz)	50
Insulation Class	II°
IP	X4
Max ambient temperature for continuous operation (°C)	50
Nominal Diameter (mm)	120
Ø Discharge Hole (mm)	119

Voltage (V)	220-240
Weight (Kg)	0,61
Delivery max (l/s)	49
Delivery max (m³/h)	175
Pressure max (mmH2O)	5
Pressure max (Pa)	49
RPM	2150
Sound Pressure level Lp [dB (A)] 3m	34,4

DIMENSIONS

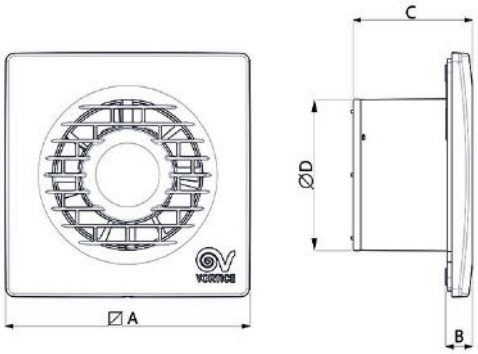

Etichetta Energetica	NO
Size A (mm)	179
Size B (mm)	17
Size C (mm)	89
Size D (mm)	119

Technical Data Sheet

CODE 11124


MF 120/5"

Wall axial fans

DESCRIPTION

• Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
• Nominal diameter 120 mm.
• Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
• Maximum air flow: 175 m3/h.
• Non-return damper fitted to outlet port.
• IMQ SAFETY and IMQ PERFORMANCE certifications.
• Vortice speed controller.

CURVES

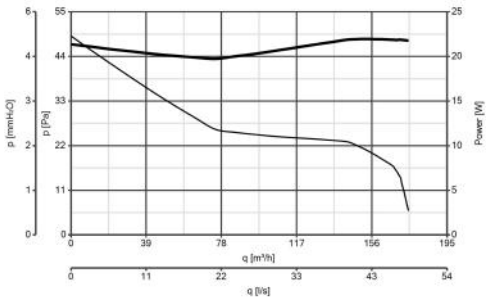


ACCESSORIES



C 1.5 (COMANDO EL. 1.5 A)
Code 12966



KIT SCB (TRASF.E.C.)
Code 22481



SF 120
Code 22163