



e-style trend



Slim wall axial fans
Ultra slim style



Complies with ErP Directive 2009/125/CE
and EU Regulation 1253/2014

Classification: Residential Ventilation Unit

17 mm

ULTRA SLIM

- To exhaust air directly to the outside or into a short length ducting (max 3 m length).
- Suitable for toilets, bathrooms, WC's, shower-rooms, utility rooms and kitchens.
- Basic version of e-style pro (no neon running light - back draught shutters upon request)
- Complete range and high aeraulic performances.
- Back drought shutter upon request.

VERSIONS



BASE - On/off through light or remote control switch.



TIMER - Integral electronic timer adjustable from 3 to 25 minutes.



MHT - Humidity control, adjustable from 40 to 80% of R.H. and Timer adjustable from 3 to 25 mm.



IPX4




PERFORMANCE


MODELS	PROTECTION	m³/h	l/s	Pa	W	dB(A)*
E-Style 100 TREND	IPX4	85	24	32	12	26,4
E-Style 120 TREND	IPX4	165	46	54	15	36,7
E-Style 150 TREND	IPX4	295	82	71	25	43,9

* Lp(A) measured at 3m in open field 230V-50Hz.

CURVES

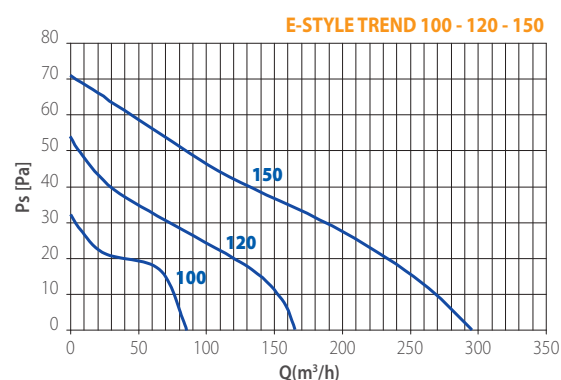

DIMENSIONS (mm)

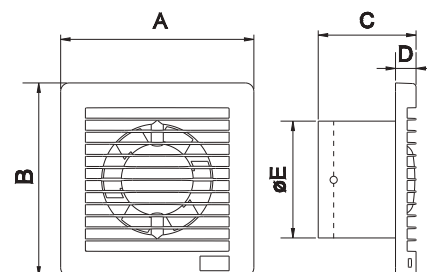

MODELS	A	B	C	D	ØE	Kg
E-Style 100 TREND	160	160	95	17	98,2	0,45
E-Style 120 TREND	180	180	101	18	119	0,66
E-Style 150 TREND	200	200	119	22	149	1,04